


Paperless Recorder

PLU800

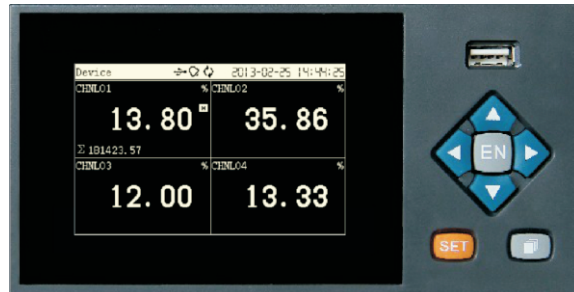







DESCRIPTION

The paperless recorder is an input signal that needs to be monitored and recorded in the industrial field, such as the temperature signal of the thermal resistance and the thermocouple, the flow signal of the flow meter, the pressure signal of the pressure transmitter etc. Data processed by high-performance microprocessors, on the one hand the high-resolution liquid crystal display screen is displayed in various forms on the screen, on the other hand these monitoring data signals stored in the interior of the large-capacity memory chip meter, for Data and graphical query, flip and print directly on the meter.

FEATURES

1. Monochrome LCD display, 320x200 resolution
2. 1-4 channel signal input, mA , V , mV , TC , RTD, etc.
3. High-precision signal input $\pm 0.2\%$ FS
4. Channel high and low limit alarm, 4 relay contact output
5. 180 days of data recording (1 minute interval) , 10 years of data is not lost
6. Varieties of data representations, digital display, bar graph, curve
7. Support channel accumulation, and support class, daily, monthly and annual reports.
8. 1 channel 4-20mA current output
9. Standard RS232C/RS485 communication interface, standard Modbus-RTU protocol
10. USB interface, support instrument data export
11. With configuration file backup and export function
12. Can be connected to a micro printer, real-time / timing print data, curve

DISPLAY

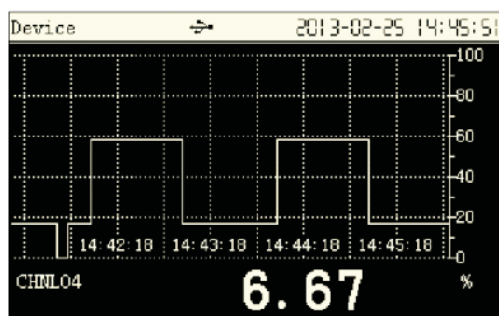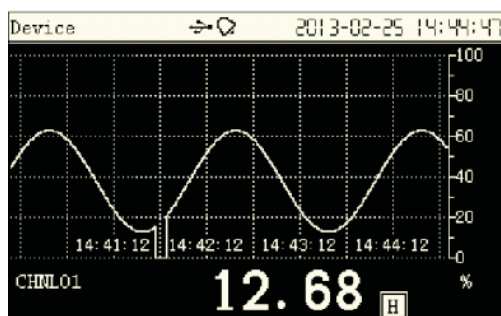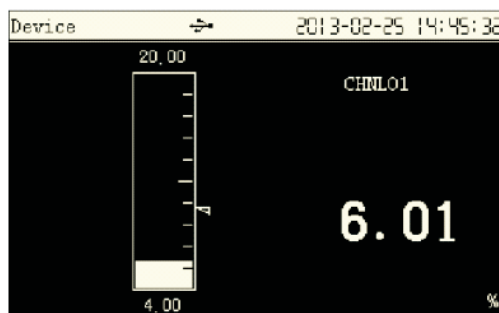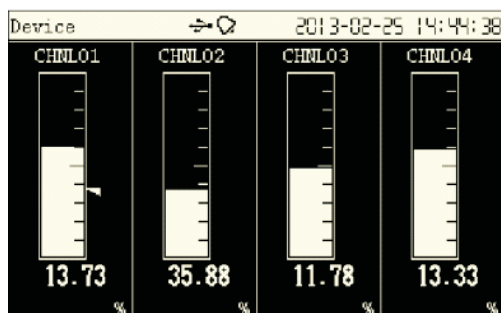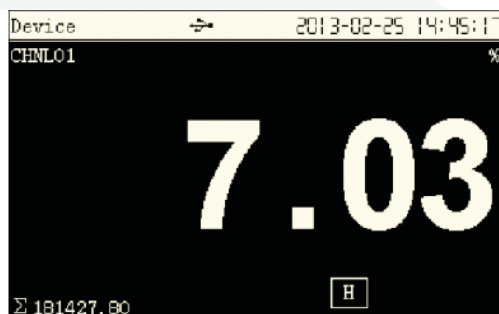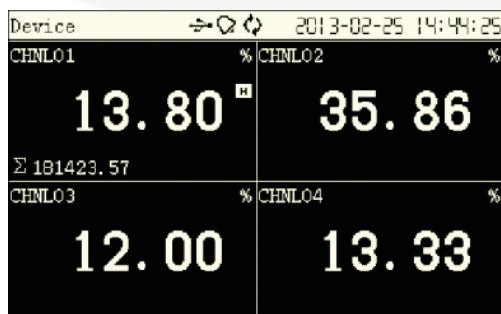

PARAMETERS

Performance parameters

Model	PLU800		
Screen size	320x200		
Channels	1 to 4 channels are optional		
Accuracy	±0.2%F.S.		
Input signal	Current, voltage, thermal resistance, thermocouple, frequency, etc.		
Output	1 channel 24V output (standard)	1 channel 4-20mA (optional)	1 to 4 relay alarm output (optional)
Communication	RS232C or RS485(Modbus-RTU)		
Relay alarm	250VAC/3A(normally open contact)		
Recording interval	1 second / minute, 2 seconds / minute, 5 seconds / minute, 10 seconds / minute, 30 seconds / minute can be set		
Data storage	3 days to 10 years (the specific time is determined by the recording interval and the number of channels)		
Dimensions(mm)	160x80		
Opening size(mm)	152x76		
Language selection	Chinese and English switching		
Power supply	100-240VAC or 24VDC±10%		
Storage environment	Ambient temperature: -10~60℃ Ambient humidity: 0~95%RH (no condensation)		
Additional features	External micro printer		

Input signal

Input method	Input type	Measuring range
Current	4~20mA	4.00~20.00mA
	20mA	0.00~20.00mA
Voltage	1~5V	1.000~5.000V
	5V	-5.000~5.000V
	10V	-10.00~10.00V
	20mV	0.000~20.000mV
	100mV	0.00~100.00mV
Resistance	400Ω	0.0~400.0Ω
Thermal resistance	Pt100	-200.0~650.0℃
	Cu50	-50.0~150.0℃
	BA1	-200.0~650.0℃
	BA2	-200.0~650.0℃
Thermocouple	S	-50.0~1768.0℃
	R	-50.0~1768.0℃
	B	0~1820℃
	K	-200.0~1372.0℃
	N	-200.0~1300.0℃
	E	-200.0~1000.0℃
	J	-210.0~1200.0℃
	T	-200.0~385.0℃
	WRE5-26	0~2310℃
	WRE3-25	0~2310℃
	F1	700~2000℃
	F2	700~2000℃
Ordinary vacuum Segmented vacuum	4~20mA	4.00~20.00mA
	1~5V	1.000~5.000V
	5V	-5.000~5.000V
	10V	-10.00~10.00V
Square root	4~20mA	4.00~20.00mA
	20mA	0.00~20.00mA
	1~5V	1.000~5.000V
	5V	-5.000~5.000V
	10V	-10.00~10.00V
Frequency	Fr	0~10000Hz
Analog	Sin	4.00~20.00
	Cos	4.00~20.00
	Square	4.00~20.00
	Triangle	4.00~20.00

Note: Frequency signal uses a dedicated channel, 1 channel.

Installation and wiring

Installation size (mm)

